


Description:

Indoor outdoor LSZH drop cable with steel strength members

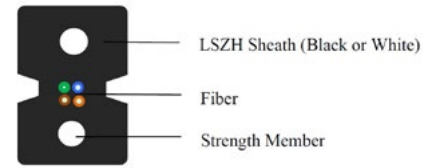

Construction:

Item		Description
Cable Diameter (2.0×3.0)±0.1mm		(2.0×3.0)±0.1mm
Approx. Cable Net Weight		11kg/km
Central Strength Member	Material	Steel Wire
	Outer Diameter	0.40±0.02mm
Optical Fiber	Type	G .657A1
	Numbers	1-4
	Fiber Color	Blue, Orange, Green, Brown
LSZH Sheath of Cable	Material	Black/White
"Fibe Attenuation Coefficient in Cable"	dB/km(1310nm)	≤0.4dB/km
	dB/km(1550nm)	≤0.3dB/km

Mechanical and physical characteristics of the cable:

Cable Type	"Tensile Strength (N)"		"Crush Resistance Strength (N/100mm)"		"Min. Bending Radius (mm)"	
	Short Term	Long Term	Short Term	Long Term	Dynamic	Static
GJXH	80	40	2200	1000	20H	10H
Operation Temperature: -40C°~+60C°						

Ordering Info:

Part Number	Description
100301	Fiber Optic Indoor Drop Cable 2 core, LSZH, 1000m/reel, flat, G657A1, with steel strength members - Black